



**PRO 3600, 5000, 10000 SERIES
Ozone Generator
Maintenance Manual**



Model	3600-1/3600-5	5,000	10,000
output	1000/3600 mg/hr	5,000 mg/hr	10,000 mg/hr
Fan size cfm	105		
Filter	Reusable washable 3 - 5 times (to reduce dust on generator plates)		
Cabinet	PVC cabinet with Stainless steal inner chassis		
Weight & size	8 lb 21"X 5"X 5"	9 lb 21"X 5"X 5"	10.5 lb 21"X 5"X 5"
Generation method	Corona discharge		

SPECIFICATIONS FOR PRO 3600,5000,10,000

PRO SERIES OPERATING REQUIREMENTS:

PRO 10000 requires all 10 generator plates to operate.

PRO 5000 requires all 6 generator plates to operate.

PRO 3600 requires 1 out of 5 plates to operate.

PRO 3600, 5000, 10000 Series **Ozone generator Owners Manual**

CAUTION: READ INSTRUCTIONS THOROUGHLY BEFORE **OPERATION OF UNIT**

(This ozone generator operates at 4200-5000 volts)

HOW OZONE WORKS:

Crystal Air air purifiers use ozone to contamination the air the same way nature uses lightning to create ozone to clean the air naturally. Ozone is very unstable and attaches to contaminants, mold, odors, etc. and oxidizes them. This reaction of ozone leaves an area with fresh clean air.

WARRANTY

The PRO 3400-1 is warranted against defects in materials and workmanship for a period of four years from date of purchase. Liability is limited to parts and labor only. Shipping is the sole responsibility the customer. CRYSTAL AIR is not liable for damage caused by shipping, misuse, neglect or lack of regular maintenance.

CAUTION: DO NOT PLUG UNIT IN WITH LID OFF

1. Read complete instructions before using ozone generator
2. Open cabinet by following step 1 of the cleaning instructions. Check to make sure the generator plate has not moved out of place. Once this has been checked the cabinet lid may be reinstalled and the unit is ready for use.

PLACEMENT AND SETTING OF MACHINE:

1. (Placement) The CRYSTAL AIR PRO series 3600, 5000 & 10000 are designed for the professional service technician or any other commercial application. This unit can be utilized as a portable service unit, or as a stationary air handling unit. The PRO series all have a front and back end cap with 4" hose pipe adapters which can provide fresh, dry air to the intake end of the unit for optimum ozone production and reduced cleaning schedules. The front output end of the unit accommodates a 4" hose to route the ozone to a central exhaust system, or any other air handling system.

2 a. The PRO Series controls feature an on/off switch powering the unit and fan. Ozone production begins when the variable ozone control is turned on.

2 d. (Setting Ozone Level) The right level is when all the generated ozone is being used up accomplishing its job. However, this is difficult to obtain because it becomes a balancing act. Initially the unit output is set high to get rid of the problem odor as quickly as possible. As this is being accomplished less ozone is required for the diminishing odors, thereby leaving some residual ozone in the air. If the unit output is not turned down after awhile then more residual ozone will be in the air. If there is a heavy smell of ozone, then there is more ozone present than is required to do the job. Simply turn the rheostat (output level control) down. This is a case where more is not considered better. The levels of ozone required to clean most environments are from .03 ppm to .1 ppm.

MAINTENANCE:

Under heavy duty use or severely polluted areas, The CRYSTAL AIR purifier should be inspected every 2 to 3 weeks for fine dust or oily residue collecting on generator surfaces or plates. Light duty use requires cleaning every 2 weeks to 6 months depending severity of pollution and the humidity level.

PRO SERIES 3600, 5000, 10000

OZONE GENERATOR PLATE CLEANING INSTRUCTIONS

(WARNING: HIGH VOLTAGE) Ensure that power supply is disconnected before starting any maintenance procedure or electrical shock injury may result. CLEANING PROCEDURE:

1 a. Locate and remove two Phillips screws from the front hose adapter, and remove adapter. Be very careful not to strip the screw holes when replacing adapter. **(SEE FIG. 1)**



Figure 1

1 b. Locate and remove the two Phillips screws from the bottom of cabinet and gently slide out the generator tray **(SEE FIG. 2+3)**.



Figure 2

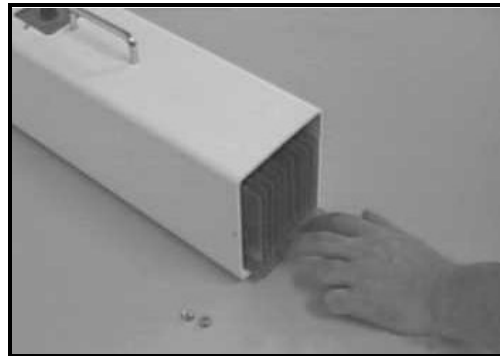


Figure 3

1 c. Locate and remove the 11/32 nut from the high voltage towers, and remove holding clip **(SEE FIG. 4)**

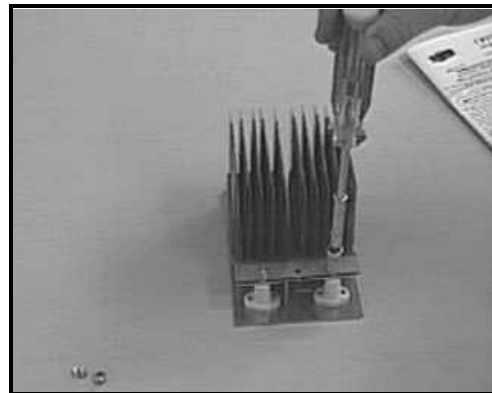


Figure 4

2. Grip generator plate just above retainer clip and gently lift plate up approx. 3/4 of the way, then re grip generator plate just above retainer clip to ensure that plates do not spread and fall apart upon removal. **(SEE FIG. 5+6)**.

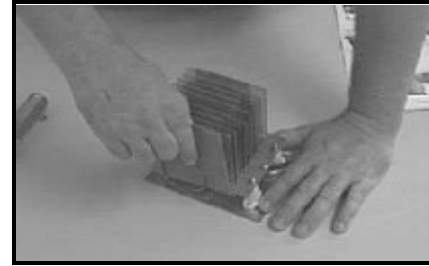


Figure 5

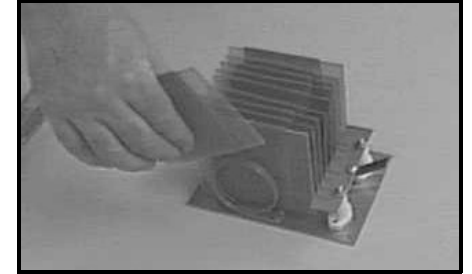


Figure 6

3. With thumb and index finger, grip mica and gently remove from outer screen. Carefully separate and place the four pieces in a shallow tray and fill with approx. 1/2 in. of water and a few drops of dish soap **(SEE FIG. 7)**. Place mica sheet totally flat on bottom of tray, and with a toothbrush gently scrub both sides of mica to remove all oxidized material from surface **(SEE FIG. 7)**. Repeat on stainless steel screens then rinse all parts in clean water.



Figure 7

4. Once mica and stainless steel screen have been cleaned, place plate assembly on middle oven rack at approx. 200 to 300 F. for 1 to 2 hours to ensure plates are completely dry.

5. Once dried, mica plates must be inspected. Hold plate up to a light to ensure no arc holes have developed (**SEE FIG. 9**) or that any other damage is present (**SEE FIG. 8+9**). With a damp cloth, (not wet) wipe out ozone generator chamber, to remove any debris which may be present.

6. Once plates are inspected and dried, they may be reassembled.

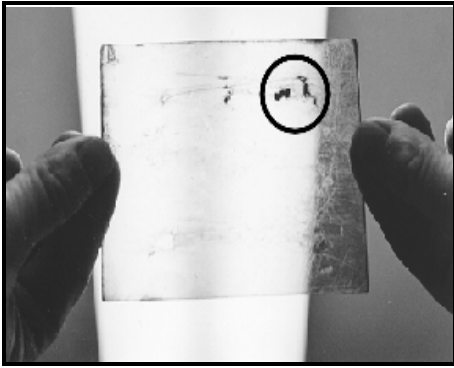


Figure 8

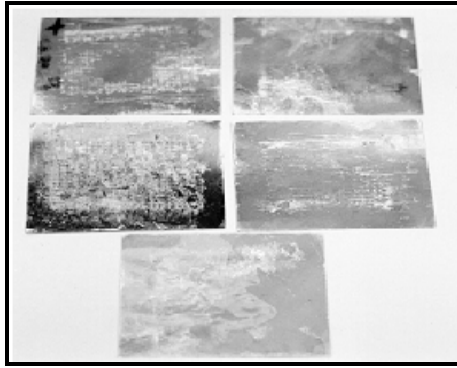


Figure 9

Place one mica sheet flat in the palm of your hand (**SEE FIG. 10**), then set the inner screen in the exact center of mica sheet. Then place the other sheet of mica on top forming a sandwich (**SEE FIG. 11**). With thumb and index finger grasp mica sandwich approx. half way (**be careful inner screen remains centered at all times**) and gently slide assembly back into outer screen. (see figure 12)




Figure 10




Figure 11




Figure 12

REPLACING SERVICED PLATE IN MACHINE:

6. Install plates in reverse order of removal being careful inner stainless steel screen remains centered at all times.

7. Once plates have been reinstalled, replace hose adapter with the two Phillips Screws, replace intake filters if dirty, then plug unit in and test for proper operation.

Note #:**Cleaning, warranty work and repairs are available from Crystalair or your local retail outlet.**

TROUBLESHOOTING:

If unit makes a snapping or popping sound, moisture may be present in generator plate (remove and bake for one hour at 100 - 200 F.). Ensure upon reinstallation that both inner and outer stainless steel are centered as close as possible, and that all components of generator are clean, dry and damage free.

MORE TROUBLE SHOOTING:

1. Fan works but no ozone:

A: Is the filter plugged ?

B: Are the plates clean and dry? (refer to maintenance section) if unit does not work after cleaning it will probably need to be sent in for service work.

2. Unit snaps or sparks:

A: Are the plates clean and dry? (refer to maintenance)

B: Is the center screen in the plate centered ? (If screen is off center place back in center of plate. (Refer to maintenance instructions for plate removal and replacement). CAUTION: (Be very careful not to scratch mica plates). If snapping or sparking still occurs, then make sure there are no little holes burned through the mica which will create a dead short.

Questions and Answers About Ozone

QUESTION: WHAT IS OZONE?

ANSWER: Ozone is sometimes called the "activated oxygen" . It contains three atoms of oxygen rather than the two atoms we normally breath. Ozone is the second most powerful oxidant in the world and its function is to destroy contaminants and odors. Interestingly ozone occurs quite readily in nature, most often as a result of lightning strikes that occur during thunderstorms. In fact that "fresh, clean, spring rain " smell that we notice after a storm most often results from natures creation of ozone. Ozone is also created by water falls. However,

we are probably most familiar with ozone from reading about the "ozone layer" that circles the planet above the earth atmosphere. Here ozone is created by the sun's ultra-violet rays. This serves to protect us from the ultra-violet radiation. Additionally, each of us is exposed to high levels of ozone daily for short periods of time. This happens in heavy traffic conditions or during times when the weather forces the industrial gases to remain lower to the ground than is otherwise normal. The combination of these two factors can result in ozone readings as high as 4 or 5 times the "regulatory" levels for continuous exposure with absolutely no adverse effects as our exposure is for such short periods, and the ozone itself decays back to normal oxygen so rapidly.

QUESTION: HOW DOES OZONE WORK?

ANSWER: While ozone is very powerful, it has a very short life cycle. When it is faced with odors, contamination, etc. the extra atom of oxygen destroys them completely by oxidation. In so doing, that extra atom of oxygen is destroyed and there is nothing left...no odor...no contamination...no extra atom, only oxygen. In addition to the effectiveness of ozone, we also know that it is safe to use. We know this from our own safe exposures daily to ozone, weather, as noted earlier, resulting from being locked in traffic, or passing through industrial areas. These exposures have no effect on us beyond our acknowledging the unpleasant odor associated with this "filthy air". It is the very unpleasantness of this air that provides ozone with it's "built in" safety mechanism. Ozone is safe because we notice it's unpleasant odor at very residual levels. By residual we mean, the amount of ozone that is produced in excess of the required amount to kill whatever contamination or odor that may be present in the room. This equipment, when installed correctly will not exceed government guidelines for continuous safe exposure. Even if installed incorrectly, ozone provides its own protection, as ozone warns us in a manner similar to smoke in a room. Ozone does this by becoming so offensive at 1.5 parts per million that we would not be able to stay in the environment for any more than a short period. This is much like what would happen if we entered a smoke filled room. However, while smoke might harm us, research has proven that such a limited exposure to such a low level of ozone would have no serious long term affect on us just as it does not affect us when caught in a traffic jam during rush hour. Carrying that example one step further, this equipment is incapable of producing ozone in sufficient quantities even if installed incorrectly and left running continuously, to cause any long term risks to your health even assuming that you could stand there and be exposed to it (remember the smoke example).

QUESTION: HOW IS OZONE PRODUCED?

ANSWER: There are basically two methods of producing ozone...ultra-violet and corona discharge. Most equipment uses the corona discharge method, simulating in essence, lightning. Equipment utilizing UV is now hard to find because it is inefficient and unreliable, and very costly to service compared to the modern corona discharge equipment now available.

QUESTION: HOW LONG DOES THE OZONE LAST?

ANSWER: As soon as ozone is formed in the generator and dispersed in a room some of it decays back into oxygen. This step occurs by several processes including the following: Natural decay (or reversion to oxygen) due to ozone chemical instability. Speeding up of the above process by the presence of such as walls, carpets etc. stimulating the decay process. Oxidation reaction with odor causing organic material, which removes ozone. Reactions with contamination etc., which again consumes ozone by oxidation reactions. Additionally ozone itself has a half life which means that "residual" ozone created (extra unneeded ozone) will return to oxygen within at most 30 minutes, in amounts equal to half its level. What this means is that after each subsequent 30 minute period there would be half as much residual ozone left at the end of the period as was present at the beginning of the period. This is similar to a geometric progression of 16:8;4;2;1. In practice the half life is usually less than 30 minutes due to contaminants in the air. Therefore, ozone while very powerful doesn't last long...just does it's job and disappears.

QUESTION: WILL THE ODOR COME BACK?

ANSWER: No. Ozone destroys the source of odor. However, in the case of mildew the odor will return if you are unable to get rid of the moisture that is the source of the mildew.

QUESTION: HOW DOES OZONE HANDLE TOBACCO SMOKE?

ANSWER: It eliminates the irritation caused by phenol gasses, by oxidizing them. Phenol gasses are the invisible part of tobacco smoke that causes such discomfort to one's eyes and create the offensive odors. Ozone rids any environment of the effects of smoke completely, rather than merely filtering out some of the visible particles like an "electronic air cleaner".

QUESTION: WHAT IS THE RIGHT LEVEL OF OZONE?

ANSWER: The right level is when all the generated ozone is being used up accomplishing its job. However, this is difficult to obtain because it becomes a balancing act. Initially the machine's output is set high to get rid of the problem odor as quickly as possible. As this is being accomplished less ozone is required for the diminishing odor etc., thereby leaving some residual ozone in the air. If the machine output is not turned down after awhile then more residual ozone will be in the air. If there is a heavy smell of ozone, then there is more ozone present than is required to do the job. Simply turn the rheostat (output level control) down. This is a case where more is not considered better. Sales successes result when the dealer ensures that the results are what the customer expects. The most successful dealers usually install equipment on a trial basis and return to the trial location 24 hours later to ensure that residual ozone levels are not too high and that the customer knows how and when to regulate the machine to avoid a strong ozone smell.

QUESTION: IS OZONE HARMFUL AND WHAT IF ANY ARE THE LONG TERM EFFECTS?

ANSWER: Ozone has been known for almost a century now, so quite a lot is known about it. Several regulatory agencies, including OSHA - Occupational safety and health agency - have stipulated that the safe allowable level of residual is .1 ppm. based upon the historical safety of ozone. Note that this permissible level is for continuous exposure throughout an entire 8 hour day for 5 days a week. If anyone is exposed to that concentration of ozone, it is usually as the by product of an industrial process like arc-welding. The temporary affects of such a low exposure would range from headaches, to sore throats, irritation in the eyes, nose and the like, similar again to what we would experience in a traffic jam. In almost a century of use however, there has never been a worker's compensation claim resulting from ozone exposure.

QUESTION: HOW CAN YOU TELL THE LEVEL OF OZONE?

ANSWER: There are a number of mechanical methods available, the most common and effective being the Draeger tube, but the simplest, least expensive and very reliable method is using the Eco (ozone monitoring) Badge. Residual ozone becomes apparent to sensitive humans in the range of .01 - .03 ppm. or well below the permissible levels for continuous exposure. As noted previously, this residual ozone is extra ozone that is not required to kill contamination etc. Adjustment of the rheostat is all that is required.

QUESTION: WHAT ARE THE APPLICABLE REGULATIONS REGARDING OZONE?

ANSWER: In Canada the Worker's Compensation Board of B.C. guidelines stipulate that continuous exposure 8 hours a day for 5 days per week in an environment containing .08 ppm. of ozone is safe. The normal concentrations that we will be using will be in the range of .01 - .03 ppm. well within the guidelines.

QUESTION: CAN OZONE BE HELPFUL IF THE CUSTOMER PURCHASES CRYOVAC'D BEEF?

ANSWER: Yes. If the premises where meat is hung, cut and eventually cryovac'd, are treated with ozone, then this meat will be virtually contamination free as it is being packaged in the cryovac. And will consequently retain its good looks and stay fresh much longer before being

sold or used than meat packed in an ozone free room where both odors and contamination count will be high. Treatment of coolers and cutting packaging rooms with ozone ensures not only a germ free environment, but also a clean smelling room that customers and employees alike associate with a caring and progressive management.

IMPORTANT NOTE ON OZONE

It is not necessary that you even smell the sweet smell of ozone (compared to fresh country air following a thunderstorm) for it to be effective. Even roses are an objectionable odor to some people, when in excess.

1.TO SET OZONE: Set ozone to a setting where you can barely detect ozone after an hour of operation.

2.If ozone is still detected in 15 minutes reduce ozone setting, if the disagreeable odor is still prevalent, increase ozone setting. Properly adjusted, neither ozone or the objectionable odor should be detected.

3. Levels of ozone required to clean most environments are from .03 ppm to .1 ppm.

4.CIRCULATION: Air circulation is an important factor in how effectively ozone works. An oscillating fan should be placed next to generator for proper circulation.

5.MOUNTING: Generator should be mounted high in the room, 6 to 8 feet off the floor. Generator should be mounted above the door pointing away from sensitive areas.

6.P.S. When entering an enclosed area such as coolers, ozone should be reduced.

A BASIC GUIDE TO DEODORIZATION USING OZONE

OZONE SHOCK TREATMENT PROCEDURE :

Suggested size: PRO-10,000 , PRO-5000 , PRO-3600-5

The idea of an ozone shock treatment procedure is to eliminate the initial contamination from the air and then provide continuous control over recurring contamination by way of ozone. First we must assess the caliber of the odor problem in order to determine the size of the Crystal Air purifier which would be required to sufficiently eliminate the problem odor in a short period of time. Once we have chosen the ideal size of purifier for the particular treatment area, the purifier should be placed pointing in the direction of the problem area. Strong fans must be placed throughout the area being treated to provide good ozone distribution. Operate the purifier at it's highest capacity for as long as it takes to eliminate the odor problem. In most cases it takes only a few minutes to do a clean out. If it is a type of odor that is absorbed in furniture, walls and bedding, for example, cigarette smoke, takes only 30 minutes with the proper sized purifier. After the shock treatment procedure is complete, air out room and place a Crystal Air purifier permanently along with an ozone monitor controller if odor problem is expected to be perpetual and constant. Severe cases may require a 24 hour treatment. Milder cases may need a smaller unit or use lower output setting.

NOTE# while performing a clean out, make sure that all people, pets, plants and other animals are vacant from the area to be treated. Also while using HIGH concentrations in a room, be sure that ozone does not leak into connected or occupied rooms by way of furnace vents or wall cracks etc..

GARBAGE ROOMS:

Suggested Size: PRO Series 3600-1, 3600-5, Depending on the size of garbage room

Place Crystal Air purifier on a shelf above the door entrance positioned so the air stream blows away from the sensitive entrance area. An additional oscillating fan will greatly enhance the deodorization results by mixing all the contaminated air efficiently with the generated ozone. A clean out procedure may be required as the first step to treatment in a garbage room. (Refer to OZONE CLEAN OUT, depending on the severity of odors prior to placement of Crystal Air purifier. Humid rooms may need dry air routed to the air purifier with a for inch vent hose.

COMPACTOR BINS:

Suggested Size: PRO 3600-1, 3600-5 Depending on severity of odor.

Crystal Air PRO series purifiers have a hose adapter for routing a four inch hose from purifier outlet to garbage compactor. Attach hose to a convenient location on compactor bin wall surface and boost the inlet hose of the Crystal Air purifier with a 265 cfm. fan to ensure the air in the compactor does not back through ozone generator. The air purifier must be mounted in a place convenient to route fresh air to it and be safe from exposure to water and rough treatment.

GROCERY STORE STORAGE AREAS:

Suggested Size: PRO 3600-1, 3600-5 or PRO-5000

To reduce odors and reduce cross contamination of foods to other foods, install a Crystal Air air purifier in an out of the way place, with an additional fan to circulate the ozone efficiently throughout the entire area to be treated. Next install an ozone generator monitor controller in the center of the treated area to ensure the levels of ozone do not exceed the limits set by the Workers Compensation Board Of BC which are .1 ppm. averaged over an eight hour work period. The controller will cycle on and off as needed to maintain control of ozone at the proper levels.

HOTEL ROOMS:

Suggested Size: PRO-3600 1 or 2

These rooms can be generally deodorized in 30 to 40 minutes from cigarette or alcohol etc., by using a PRO-3600 1 or 2 and a 20" oscillating fan.

Housekeeper should also wet/dry vacuum the contaminated areas, (ex. vomit, spilled milk, spilled beer). with a good detergent solution before deodorization procedure is performed.

ANIMAL URINE:

Suggested Size: PRO-3600-1, PRO-3600-5

Customer must locate and identify the area of the urine contamination if possible. Treat all contaminated surfaces with a liquid deodorizer. *(All liquid contaminants must first be treated with a liquid deodorizer)*. Customer may have to pull up carpet, if present, in order to treat both sides if possible. Also treat the porous concrete or wood beneath the carpet. Allow liquid deodorizer to dry, then place Crystal Air purifier in the room with an additional fan to eliminate the gaseous odor absorbed by the carpet, walls, wood and fabric furniture, mattresses etc.. Treat up to 48 hours depending on the severity of odors.

DECOMPOSED PROTEIN:

Protein contamination is the result of food products such as milk, fish, meat, eggs etc. Other sources are from human or animal bodily discharge (like blood, urine, feces etc), decomposed meat, decomposed animal within a crawl space, death scene (decomposed body). In all cases of decomposed protein, the source of the odor must be removed as the first step to deodorization. (It is suggested that gloves and a respirator be worn to reduce the exposure to fleas and deadly contamination). Next treat the contaminated surfaces of the floor or any other items the protein was contacting with a liquid sanitizing solution to kill the contamination. Then a good liquid deodorizer like Crystal Air C-20 or G-100 should be applied to all contaminated surfaces. Once the liquid sanitizer and deodorizers have been applied and dried, the Crystal Air purifier may be placed in the treated area at a setting of medium to high to eliminate the gaseous odor absorbed by the walls and furniture etc. Use a strong fan to help force ozone in to the pores of walls and furniture fabric.

Note : Ozone may be set on a low setting before the technician does anything to deodorize the air in order to make the environment more comfortable to work in.

RULES OF THUMB:

a. Odors created in a hot environment are embedded deeper in the pores of the materials such as curtains, furniture, wallboard etc. This is due to pores expanding when hot and closing when cold. A warm environment will always produce better results than a cold one when deodorizing a gaseous odor.

b. Humidity always produces or enhances an odor. Existing odors are amplified to the human nose and odor causing contaminants like bacteria and fungus flourish in warm and humid environment.

c. Overkill and persistence is the successful way to deodorizing.

d. An additional fan of high output is necessary in all ozone treatments for optimum results. The fan will force the ozone into the small pores of the material to remove the odors absorbed.

e. In all decomposed protein, use a powerful sanitizer or bactericide and a powerful liquid deodorizer like Crystal Air C-20 or G-100

f. Always use respirator and gloves when handling contaminated materials like rotten meats or dead animals.

g. Caution in areas of treatment using high levels of ozone. Treat all exposed natural rubber with a silicone spray or Vaseline in order to prevent cracking. This is not the case with fabric covered rubber cushions

h. Humid air supplied to the ozone generator will result in less ozone production. Dry air supplied to a generator will result in optimum ozone production.

Caution:

. The water in moist or wet surfaces of fabrics combined with high ozone may create Hydrogen Peroxide and result in bleached material. Avoid high humidity situations combined with high ozone concentrations.

SMOKING LOUNGES:

Suggested Size: PRO-360, CA-15, CA-55-2, CA-45-2, PRO-3600-1.

Crystal Air purifier should be properly sized for the specific area and number of possible smokers. Place the air purifier close to the ceiling and away from roof exhaust vents. Complement purifier with an oscillating fan to circulate and mix the ozone and contaminated air together to speed up the deodorization process. Adjust Crystal Air purifier so that there is just a fresh smell in the air. Begin with the purifier on low setting and work your way up slowly. One person at the establishment should be in charge of adjusting the purifiers output as the number of smokers increase or decrease. If ozone is set for 40 smokers and 30 vacate, then the purifier should be adjusted to lower setting, otherwise the air will become excessively ozonated and possibly cause sore throat or headache. An ozone monitor controller may be installed to eliminate the need to constantly adjust the ozone output.

OFFICES AND STORE FRONTS:

Suggested Size: PRO-360, CA-15, CA-55-1

The same procedures are used here as in the smoking lounges with one exception, usually there is no smoking in offices and store fronts, therefore a smaller air purifier may be required.

SMOKE DAMAGE CAUSED BY FIRE :

Suggested Size: PRO-10000, PRO-5000

In cases of small fire and smoke damage (e.g.: Grease Fire on stove, Severe toaster fire, fire place back through, mattress fire, electrical fire etc). With smoke fumes the premises should be thoroughly cleaned including the forced air furnace system before deodorization begins. Place a Crystal Air purifier on each level of the building accompanied with a good blower fan to force the ozone through the small pores of the walls, carpet, and furniture. This process may take up to 24 hours for adequate results to be achieved. Furniture and mattresses may need additional treatment by draping a sheet of plastic over them and placing an ozone generator underneath for approx. 1-2 hours.

MOLD AND MILDEW:

Suggested Size: PRO-10000, PRO-5000, PRO-360 CA-15 or CA-55-1

Crystal Air purifiers reduce or eliminate the ability for the exposed mold, mildew and fungus to grow. Mold and mildew grow in dark and humid places where there is a lack of oxygen. In all cases the moisture and humidity in the walls, floor etc., must be removed to effectively eliminate the problem. Once moisture is removed, all visible mold and mildew must be removed, then a clean out procedure can be performed lasting for 2-6 hrs. A small air purifier can be used to control continuous mildew problem odors.

AUTOMOBILES TRUCKS BOATS & RVs:

Suggested Size: PRO-3600-1, PRO-3600-5

Cigarette smoke and most other organic vapors can be removed from a car, truck, boat, motor home etc in 30-45 minutes. Place Crystal Air purifier in automobile, roll windows down ½ inch, and adjust vent fan on full. Operate ozone at half to full for 30-45 minutes. Air out auto and smell for lingering odors. Repeat the procedure if necessary.

CAUTION:

Some auto odors are a result of chemical fragrance deodorizers that are non ozone depleting and therefore are very difficult to eliminate. Animal dander and oils embedded under the carpet, and sometimes must be lifted and cleaned with a liquid deodorizer before treatment with ozone.

MUSTY BOOKS: *Suggested Size: PRO-3600-1, PRO-3600-5*

Books must be placed in a room and be opened as wide as possible. Arrange Crystal Air purifier and fan to blow over the books. This process should take no more than one hour. Repeat if necessary.

FURNITURE AND CLOTHING ARTICLES: PRO 3600-1, PRO 3600-5, PRO-5000.

Make or utilize a room of proper size to accommodate all the articles to be deodorized. Place circulating fans in the room to vigorously blow the ozone around the room to penetrate the porous materials. Rout a four inch vent hose from the ozone output to a four inch cut out in the wall of the deodorization room. This procedure may go on for 1-12 hrs depending on the circumstances.

All procedures are basic. For more intense and extensive procedures, consult Crystal Air or refer to fire and flood manual for comprehensive procedures

April 2001

CRYSTAL AIR Canada Inc.

QUALITY CONTROL

Phone 1 888 424 7103

1604 589 9204

Fax 1604 589 8340

Web site <http://www.ozone.ca>

E-mail info@ozone.ca